

CALCULATION OF BOTTOM SEDIMENTS IN MOUNTAIN RIVERS BASED OF FIELD DATA

Arifjanov Aybek Muxamedjanovich,

DSc, professor Tashkent institute of irrigation and agricultural mechanization enjineers (TIAME)

Samiev Luqmon Nayimovich,

Docent, PhD. Tashkent institute of irrigation and agricultural mechanization enjineers (TIAME)

Ahmedov Islombek G'ulomjonovich,

PhD. Student Tashkent institute of irrigation and agricultural mechanization enjineers (TIAME)



Crossref <http://dx.doi.org/10.26739/2433-202x>

Issue DOI <http://dx.doi.org/10.26739/2433-202x-209-2019-1-3>



Article DOI <http://dx.doi.org/10.26739/2433-202x-2019-1-3-15>

Abstract: In this article there were given the results of the deformation processes where happens in the mountainous riverbeds and result of analyse of influence factor of riverbed creation. Based on the field experiment data analysed methods for calculation discharge of bottom sediments.

Key words: diameter, bottom sediments, riverbed, deformation, discharge, velocity, flow.

Modification of calculation technics and technologies of changes in riverbeds and prediction of deformation in its one of the most important issues of hydro technical constructions. In this regard, in the riverbed evaluation procedure it is important to determine the effects of sedimentation and soil washing of the river bed, in exploitation condition of hydro technical constructions, drainage channels from rivers.

The problem of calculating sediment discharge in the river is one of the most complex and unsolved problems in the theory of processes in bed. Nowadays, for solving those problem created different methods and formulas by several authors [1, 2, 3, 4,5, 6].

In this article were given discussion of different methods for calculation bottom sediments discharge based of field experiments which provided in Sokhsoy mountainous river of Ferghana valley (Fig. 1).

The characteristically feature of the Sokhsoy which chosen as research area is that the water flows only at certain times. This object can be considered as a natural experiment field.

In order to determine the amount of sediment and fractional composition of the sediments in the Sokhsoy river, several pickets were selected on the riverbed, and provided analysis about river bed and flow parameters (Fig. 1).

Japan, Osaka

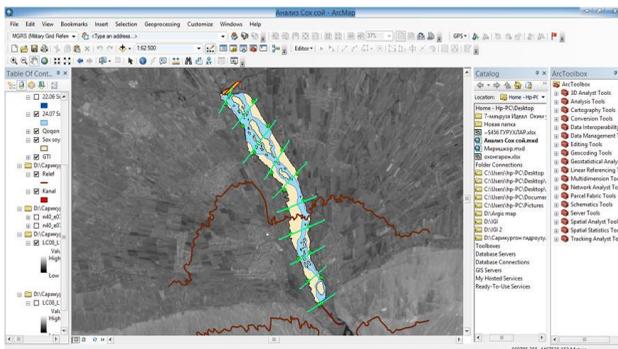


Figure 1. Map of Sokhsoy

GIS is the main tool for analyzing Satellite images. It has opportunity to collect information fast and in high masshtapand to analyze it with high accuracy. The Sokhsoy area consists of two trapeziums of SRTM data. These areas are trapeziums in latitude 40 degrees north and 70-71 western longitude trapeziums. These images were loaded into GIS and extracted using the Extract by Mask operator and analyzed. These images have a pixel resolution of up to 30 m / pixels. At the end of analysis, a general map of Sokhsoy was created.

The riverbed of the Sokhsoy was separated into 10 parts and provided a monitor of accumulation and deformation processes throughout the year.

In the experiments, the change in sediment content, fractional composition and their length was analyzed. During the year, flow discharge and sediment concentrations information were collected and the results were shown in Figure 2 (on one picket PK-12).

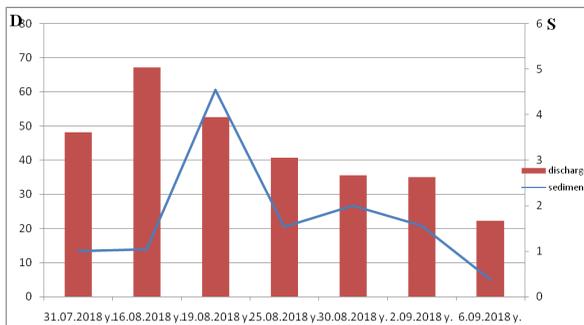


Figure 2. Schedule of dependence of sediment flow with water discharge

In fig. 3 were given changement of the sedimentation of the flow along the flow leigh in theSokhsoy.

On the basis of the data which collected in natural field experiments in the Sokhsayriverbed, analyzed sediment discharge with several calculation methods.

Analyzed natural field experiment data, the average values are given in the table (Table 1).

H, m	i	d,m	Q,m ³ /s
1,1	0.01	0.0055	60

There: H – water level of the flow, i –slope of the bottom, d –average diameter of the sediments, Q –water discharge

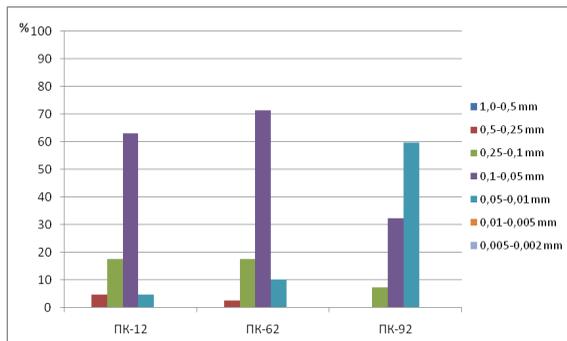


Figure 3. The fractional structure of the sediments in the Sokhsoybed by the PCs. The following methods have been selected for mountain rivers [7, 8, 9, 10] for analyze of calculation bottom sediments:

According to G.I.Shamov [11] method, sediment discharge and initial velocity are determined as follows.

$$q = k \left(\frac{g}{g_0} \right)^3 (g - g_0) \left(\frac{d}{H} \right)^{0.25} \quad (1)$$

k - coefficient which relates to the sediment composition.

There: g_0 – initial speed of the sediment movement in stationary flow;

The initial speed in the steady movement calculates as follows:

$$g_0 = 4,4d^{1/3}H^{1/6} \quad (2)$$

According to the I.I.Levi [12] method consumption of the bottom sediment and initial velocity calculates as follow.

$$q = 0,002 \left(\frac{g}{\sqrt{gd}} \right)^3 (g - g_0) \left(\frac{d}{H} \right)^{0,25} \quad (3)$$

In this calculation method, the initial speed is determined as follows:

$$g_0 = 3,2 \sqrt{gd} \lg \frac{H}{7d} \quad (4)$$

According to the L.G.Gvelesianimethod, bottom sediment discharge and initial velocity are determined as follows.

$$q_r = 12,95 \frac{d g_0}{\left(\lg \frac{12d_{\max} + d}{d} \right)^2} \left(\frac{g^3}{g_0} - 1 \right) \left(\frac{g}{g_0} - 1 \right) \quad (5)$$

In this calculation method, the initial speed is determined as follows:

$$g_0 = 3,4 \frac{\lg \left(\frac{8,8H}{d} \right)}{\lg \left(\frac{12d_{\max} + d}{d} \right) \sqrt{d}} \quad (6)$$

Depending on the formula (1), (3), (5) discharge of the sediments were calculated according to the field experiments (Table 1), and the results are given in the Table (Table 2).

Table 2. Calculation of bottom sediment discharge

№	Author's	Calculation formula	Result m ³ /s
1	G.I.Shamov	$q = k \left(\frac{g}{g_0} \right)^3 (g - g_0) \left(\frac{d}{H} \right)^{0,25}$	0,01
2	I.I.Levi	$q = 0,002 \left(\frac{g}{\sqrt{gd}} \right)^3 (g - g_0) \left(\frac{d}{H} \right)^{0,25}$	0,016
3	L.G.Gvelesiani	$q_r = 12,95 \frac{d g_0}{\left(\lg \frac{12d_{\max} + d}{d} \right)^2} \left(\frac{g^3}{g_0} - 1 \right) \left(\frac{g}{g_0} - 1 \right)$	0,3

Conclusion. The results of the analysis shows that the difference of the results varies from 38% to 97%. When using the different methods and formulas for sediment discharge, it is necessary to improve the work with taking into account hydrological and hydraulic conditions of each region.

Japan, Osaka

Reference

1. Latipov K.Sh., A.M.Arifjanov. Questions of sediment movement in river flow. - Tashkent: Mehnat, 1994. - 110 p.
2. Karashev A.B. Theory and methods of calculation of river sediments-Hydrometeoizdat - L., 1977. - 444 p.
3. Debolsky V.K., et all. Dynamic of riverbed and dynamic of lake bank - Science. M, 1994. - 301 p.
4. Arifjanov A.M., Fatkhullaev A.M., Samiev L.N., processes in riverbed and river sediments. T.: Monograph. The light of the publisher, 2017.-191p.
5. Meyer-Peter E. Miller R. Formulas for bed-load transport. -Ln. Proc. II Congr. IAHR, Stockholm, 1948, Vol 3, Pp. 39-64.
6. Arifjanov A.M. Methods of sediment transportation in the changeable cross section of the river // Hydrotechnical construction.-M, 2004.- №4, - Pp.50-54.
7. Arifjanov A.M., Fatkhulloev A.M. Dynamics of sediment flow in the riverbed. Fan.- T, 2014. -124 p.
8. Engelund R.Hansen E. A. Monograph on sediment transport on Alluvial Streams. Techniques Vorlag Copenhagen, 1967.
9. Ackers P., Ehite W.R. Sediment Transport New approach and analysis. Pros ASCE, Now. 1973, 99 (HY11-), Pp. 2041-2050.
10. Van-Rayn, LC, A simple general expression for longshore transport of sand, gravel and shingle. Coastal Engineering, Vol. 90, 2014. Pp.23-39.
11. Shamov G.I. River sediments. L.: Hydrometeoizdat, 1969. - 678 p.
12. Levi I.I. Dynamic riverbed flow. - M.-L. : Gosenergoizdat, 1957, 252 p.